

SUNNY TRIPOWER CORE1

STP 50-40



STP 50-40



SMA ShadeFix
STRING LEVEL OPTIMIZATION

World's first free standing inverter

Up to 60 % faster installation for commercial PV systems

Cost-Effective

- Floor-mounted device easy to install
- No DC fuses required
- Integrated DC disconnect

Highly Integrated

- Integrated Wi-Fi access with any mobile device
- 12 direct string inputs reduce labor and material costs
- AC/DC overvoltage protection (optional)

Fastest Installation

- Fast grid connection due to easy inverter configuration and commissioning
- Completely accessible connection areas

Maximum Yields

- Up to 150% DC:AC ratio
- Yield increase without installation effort due to integrated shade management SMA ShadeFix

SUNNY TRIPOWER CORE1


Stands on its own

The Sunny Tripower CORE1 is the world's first free-standing string inverter for decentralized rooftop and ground-based PV systems as well as covered parking spaces. The CORE1 is the third generation in the successful Sunny Tripower product family and is revolutionizing the world of commercial inverters with its innovative design. SMA engineers developed an inverter that combines a unique design with an innovative installation method to significantly reduce installation time and provide all target groups with a maximum return on investment.

From delivery and installation to operation, the Sunny Tripower CORE1 generates widespread savings in logistics, labor, materials and services. Commercial PV installations are now quicker and easier to complete than ever before.

BLOCK DIAGRAM

STP 50-40

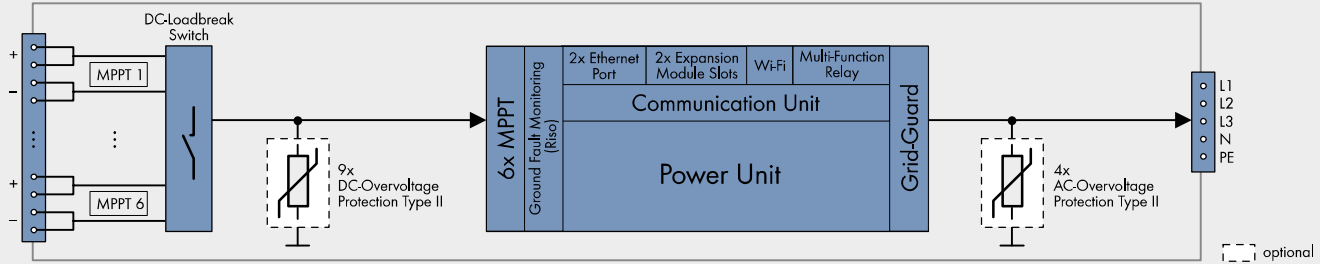

Technical Data

Sunny Tripower CORE1

Input (DC)

Max. generator power	75000 Wp STC
Max. input voltage	1000 V
MPP voltage range / rated input voltage	500 V to 800 V / 670 V
Min. input voltage / start input voltage	150 V / 188 V
Max. operating input current / per MPPT	120 A / 20 A
Max. short circuit current per MPPT / per string input	30 A / 30 A
Number of independent MPPT inputs / strings per MPP input	6 / 2

Output (AC)

Rated power (at 230 V, 50 Hz)	50000 W
Max. apparent AC power	50000 VA
AC nominal voltage	220 V / 380 V 230 V / 400 V 240 V / 415 V
AC voltage range	202 V to 305 V
AC grid frequency / range	50 Hz / 44 Hz to 55 Hz 60 Hz / 54 Hz to 65 Hz
Rated power frequency / rated grid voltage	50 Hz / 230 V
Max. output current / Rated output current	72.5 A / 72.5 A
Output phases / AC connection	3 / 3-(N)-PE
Power factor at rated power / Adjustable displacement power factor	1 / 0.0 leading to 0.0 lagging
THD	< 3%

Protective devices

Input-side disconnection device	●
Ground fault monitoring / grid monitoring	● / ●
DC reverse polarity protection / AC short-circuit current capability / galvanically isolated	● / ● / -
All-pole sensitive residual-current monitoring unit	●
Protection class (according to IEC 62109-1) / overvoltage category (according to IEC 62109-1)	I / AC: III; DC: II
AC/DC surge arrester (type 2, type 1/2)	○

Technical Data

Sunny Tripower CORE1

Efficiency

Max. efficiency / European efficiency	98.1% / 97.8%
---------------------------------------	---------------

General data

Dimensions (W/H/D) without feet or DC load break switch	569 mm / 733 mm / 621 mm (22.4 in / 28.8 in / 24.4 in)
Weight	84 kg (185 lb)
Operating temperature range	-25°C to +60°C (-13°F to +140°F)
Noise emission (typical)	< 65 dB(A)
Self-consumption (at night)	4.8 W
Topology / Cooling concept	Transformerless / OptiCool
Degree of protection (as per IEC 60529)	IP65
Climatic category (according to IEC 60721-3-4)	4K4H
Max. permissible value for relative humidity (non-condensing)	100%

Features / functions / accessories

DC connection / AC connection	SUNCLIX / screw terminal
Mounting feet	●
LED indicators (status / fault / communication)	●
LC display	○
Interface: Ethernet / WLAN / RS485	● (2 ports) / ● / ○
Data interface: SMA Modbus / SunSpec Modbus / Speedwire, Webconnect	● / ● / ●
Multi-Function relay / Expansion Module Slots	● / ● (2 ports)
Shade management SMA ShadeFix / Integrated Plant Control / Q on Demand 24/7	● / ● / ●
Off-grid capable / SMA Fuel Save Controller compatible	● / ●
Guarantee: 5/10/15/20 years	● / ○ / ○ / ○


* Does not apply to all national appendices of EN 50438

● Standard features ○ Optional - Not available
Data at nominal conditions - status: 02/2020


Type designation

STP 50-40

Efficiency Curve

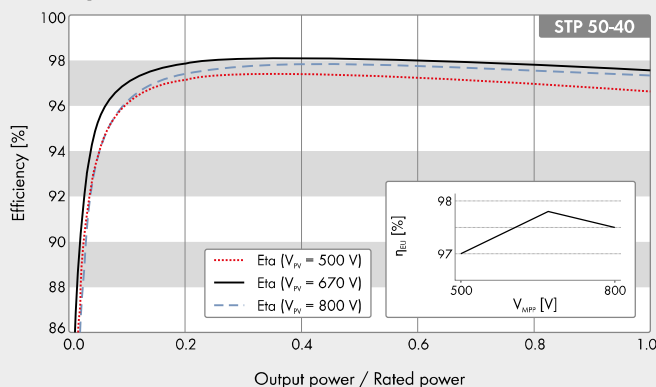

Assessories



AC_SPD_Kit1-10, AC_SPD_KIT2_T1T2
DC Surge Protection Module Kit type 2, type 1/2
DC_SPD_Kit4-10, DC_SPD_KIT5_T1T2